

Altimo CH601SS

Stainless Steel 60cm Chimney Hood


EAN 0745125572215

Key Features:

3 Fan Speeds

Push Button Controls

Non-branded Design

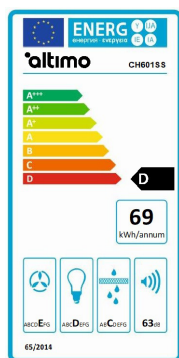

TECHNICAL SPECIFICATION

Type	Chimney Hood	Energy Efficiency Class (EEI)	D
Width	600mm	Duct or Recycle Compatible	Yes
Speeds	3 Speed	Duct	Ready from factory
Control type	Push Button	Duct Outlet Diameter	120mm round
Extraction rate	320m3	Charcoal Filter (optional)	Altimo CF003
Illumination	2 x 3w bulb LED	Quantity Needed Per Change	2 required (2 supplied)
Installation Height - Electric Hob	65cm minimum	Voltage	AC220-240v 50hz
Installation Height - Gas Hob	75cm minimum	Motor Power	125w
Installation Template	Supplied	Lamp Power	2 x 3w
Cable termination	13a UK plug	Total Power	131w
Cable length	150cm	Annual Energy Consumption (AEC) (kWh/a)	69.2
Fluid Dynamic Efficiency (FDE)	8.9	Minimum Air Flow in normal use (m3/h)	182
Fluid Dynamic Efficiency Class (FDE)	E	Maximum Air Flow in normal use (m3/h)	291
Light Efficiency (LE)	15	Sound Level at Minimum Speed (dB)	53
Light Efficiency Class (LE)	D	Sound Level at Maximum Speed (dB)	63
Grease Filtering Efficiency (GFE)	75.9	Power Consumption in off mode (w)	0
Grease Filtering Efficiency Class (GFE)	C		

Please note: Extracting air through ducting does not require use of a charcoal filter. Optional charcoal filters are used to help remove cooking odours from the air before it is recycled back into the kitchen.